

PRODUCT DESCRIPTION

Traditional wall mounted luminaires providing efficient LED lighting for commercial and industrial applications. Fixtures are constructed with a corrosion resistant diecast aluminum housing and powder coat paint finish. Available in full cut off and half cut off light distribution as well as 4000K and 5000K color temperatures.



FEATURES

- ETL
- IP65 Rated
- Stainless Steel Screws
- 5 Year Warranty

PERFORMANCE RATINGS AND CERTIFICATIONS

ETL

PERFORMANCE SUMMARY

Lumens: 4,641 (40W), 6,512 (60W), 8,148 (80W)

Lumens per Watt: 110

CRI-Minimum: >70

Operating Environment: -40°C to 40°C

IP Rating: IP65

KIT INFORMATION

Finish: Corrosion resistant, rugged die-cast aluminum housing with powder coat paint finish

Mounting: Wall mount

Dimensions: 14.2" x 9.1" x 7.7"

ELECTRICAL SYSTEM CHARACTERIZATIONS

Voltage: 120VAC-277VAC

Dimming: 0-10V (Optional)

Power Factor:

THD:

WARRANTY

5 Year Standard Warranty Limited

ORDERING MATRIX


Example: ST-SL-L-600W-30-15D-MT-SGR1

Family	Product	Watts	Color Temp	Beam Angle	Voltage	Options
ST	ST-WP-01A					

ST	ST-WP-01A	40W 60W 80W	40 = 4000K 50 = 5000K		MT = 120-277V	PC1 = Photo Cell 120VAC PC2 = Photo Cell 277VAC SRG1 = 100-277VAC Surge Protection 010V = 0-10V Dimming
----	-----------	-------------------	--------------------------	--	---------------	--

PHOTOMETRICS

- 0.1 fc
- 0.5 fc
- 1.0 fc
- 5.0 fc

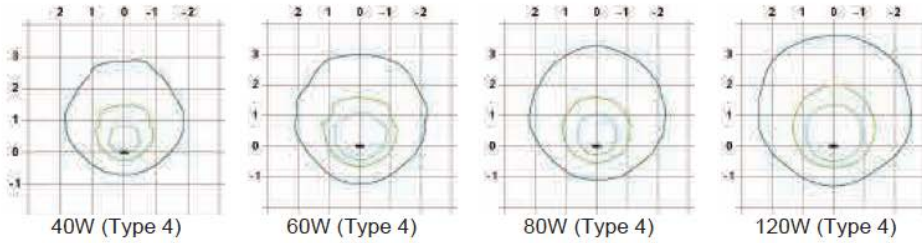

Isofootcandle plots = ALL Models in 5000K CCT
 @ 10' (3.048 m) mounting height.
 Distances are in units of mounting height.